



ADS FLEXSTORM DIMENSIONAL / ORDER FORM

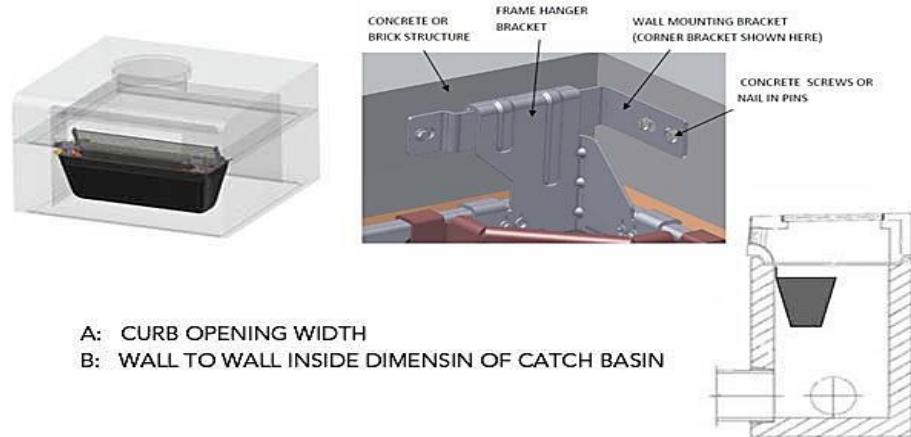

INLET TYPE: Open Throat Curb Inlet (Wall Mount Filters)

FORM WM

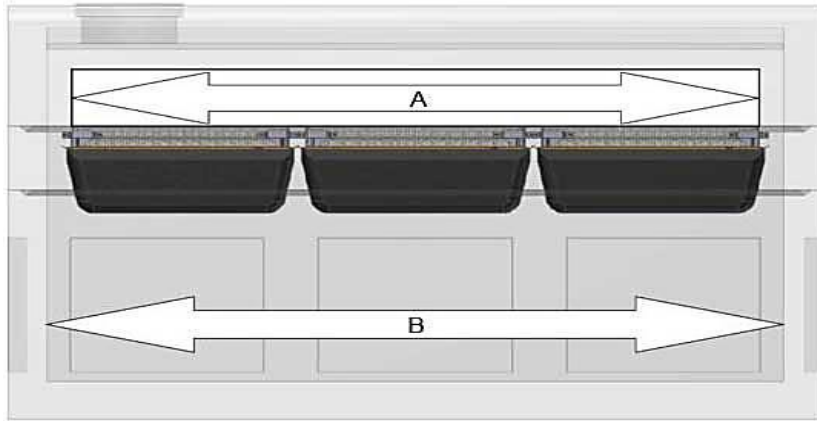

Casting or Precast Make and Model No.:	
DOT Standard Callout:	

CATCH-IT COMPLETE P/N (galvanized with FX bag)	PURE Frame P/N (STAINLESS STEEL)	Sizes
62WM1FX	62HDWM1	Up to 4' curb openings (A) (1 Filter and Mounting Hardware)
62WM2FX	62HDWM2	Between 4' and 8' curb openings (A) (2 Filters and Mounting Hardware)
62WM3FX	62HDWM3	Between 8' and 12' curb openings (A) (3 Filters and Mounting Hardware)
62WM4FX	62HDWM4	Between 12' and 16' curb openings (A) (4 Filters and Mounting Hardware)

REF	Measured Dimensions (+/- .1")
*A	
*B	

* Required Dimensions. If casting or precast make and model numbers are unknown then all required dimensions must be provided and accurate to +/- .1"

CATCH-ITs come standard with FX bags. PURE P/N = FRAME P/N & BAG P/N

1. ENTER YOUR PURE FRAME PART NUMBER FROM TABLE ABOVE

** For STAINLESS STEEL FRAMING be sure to select the PURE Frame part number

2. ENTER YOUR DESIRED BAG PART NUMBER FROM TABLE BELOW

FLEXSTORM FILTER BAGS	(22" depth) STD Bag P/N	(12" depth) Short Bag P/N	Clean Water Flow Rate (GPM/SqFt)	Min A.O.S. (US Sieve)
FX: Standard Woven Bag	FX	FX-S	200	40
FX+: Woven w/ MyCelx	FXP	FXP-S	200	40
FXO: Woven w/ Oil Boom	FXO	FXO-S	200	40
PC: Post Construction Bag	PC	PC-S	137	140
PC+: PC Bag w/ MyCelx	PCP	PCP-S	137	140
LL: Litter and Leaf Bag	LL	LL-S	High	3.5
IL: IDOT Non-Woven Bag	IL	IL-S	145	70

3. PURE P/N = COMBINE FRAME P/N & BAG P/N:

REQUIRED ORDER INFORMATION	
ADS FLEXSTORM P/N:	
Qty Required:	
Ref Casting make/model or Precast make/model (if known):	
Ref DOT Standard Type / Callout (if known):	
Customer Name:	
Contact Name:	
Contact Number:	
Ref PO#:	
Ref Job Name and/or Inlet Location:	

Important: If casting or precast make and model numbers are unknown then all physical dimensions are required. For help on how to measure your inlet please visit www.inletfilters.com.

** Note: when using FLEXSTORM Inlet Filters for Post Construction requirements, ADS strongly recommends Stainless Steel Framing for 25 year life rating.

Filter Application (check one or both):	
During Construction:	
Post Construction:	