

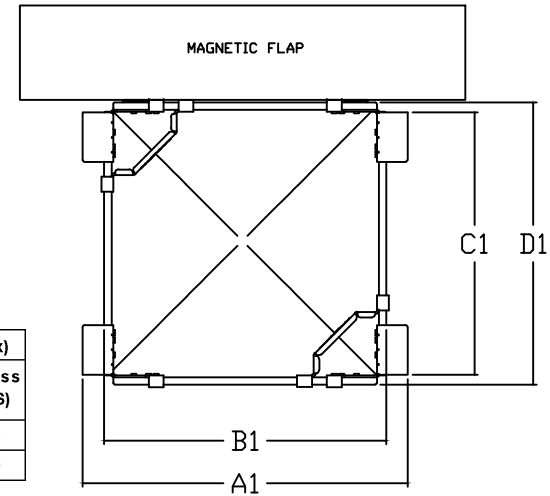


FLEXSTORM P/Ns 62SCBFX

SQCB INLET TYPE: RAISED CAST IRON FRAME AND GRATE WITH CURB HOOD

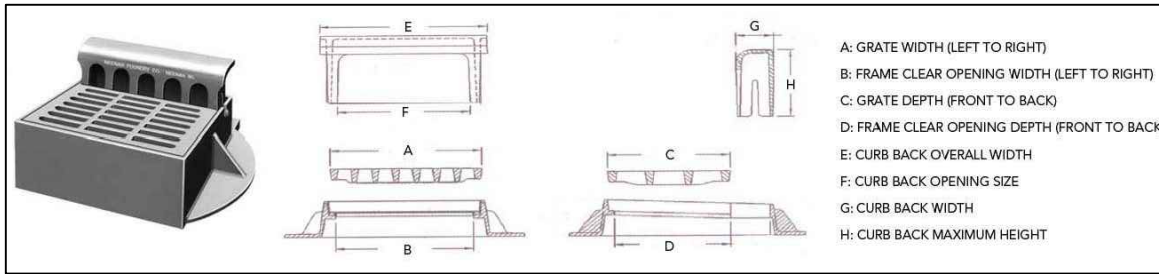

Catch-IT Frame with FX Bag		Field Inlet Dimensions		Flexstorm Framing Dims				Flexstorm Ratings (Flow at 50% max)		
ADS P/N	Flexstorm Item Code	Grate Size (A x C)	Clear Opening (B x D)	B1	D1	A1	C1	Bag Capacity (ft³)	FX/FX+ Flow Rate (CFS)	Bypass (CFS)
62SCBFX	C-SQCB-200-109-176-85-FX	20 x 10.875	17.6 x 8.5	17.0	7.5	19.0	7.5	0.8	1.0	2.4
62SCBFX	C-SQCB-200-109-185-90-FX	20 x 10.9	18.5 x 9.0	18.0	8.0	20.0	8.0	0.9	1.1	2.5

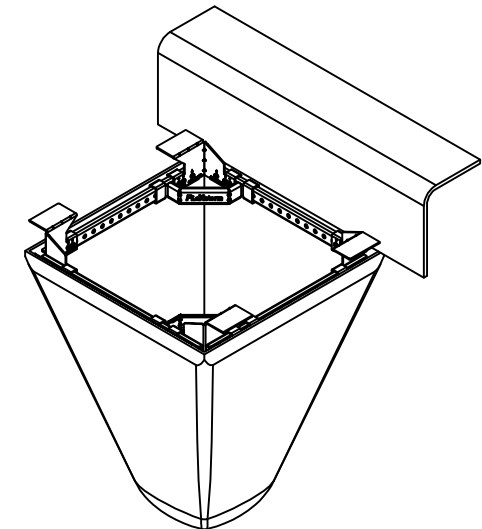

NOTES:

1. RATINGS SHOWN ARE FOR STANDARD 22" BAG DEPTH; "SHORT" 12" DEPTH BAGS ARE AVAILABLE WITH -S SUFFIX; RATINGS REDUCED BY ~50%.




2. THE FOLLOWING REQUIRES ADDITIONAL REVIEW

- GRATES WITH EXTENDED BOTTOMS
- ANY OBSTRUCTED INLET OPENINGS

	ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC A DIVISION OF ADS, INC. WWW.INLETFILTERS.COM (866) 287-8655 PH (630) 355-3477 FX INFO@INLETFILTERS.COM		
	SIZE C	FRAME TYPE SQCB1	DWG NO C-62SCB-FX
<small>THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH FLEXSTORM HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISCLOSURE TO OTHERS IS PROHIBITED, EXCEPT BY WRITTEN PERMISSION FROM FLEXSTORM. ©2013 ADS, INC.</small>			
SCALE	SHEET 1 OF 1		

FLEXSTORM P/Ns 62MCBFX

SQCB INLET TYPE: RAISED CAST IRON FRAME AND GRATE WITH CURB HOOD

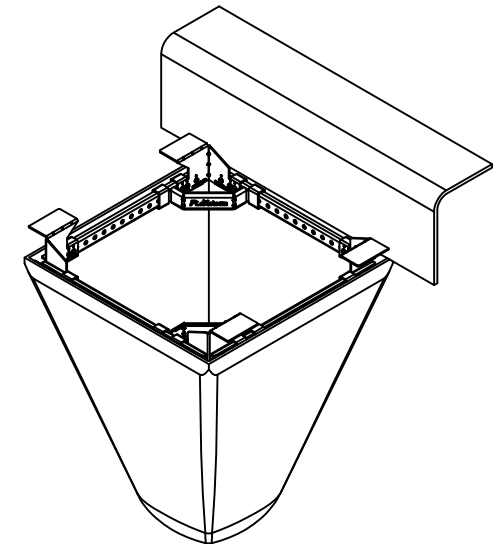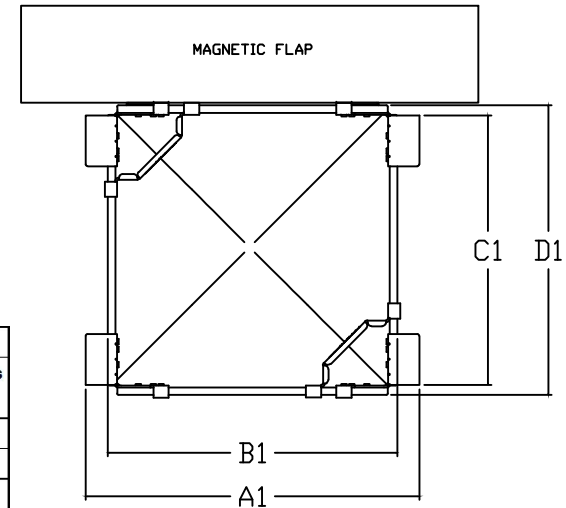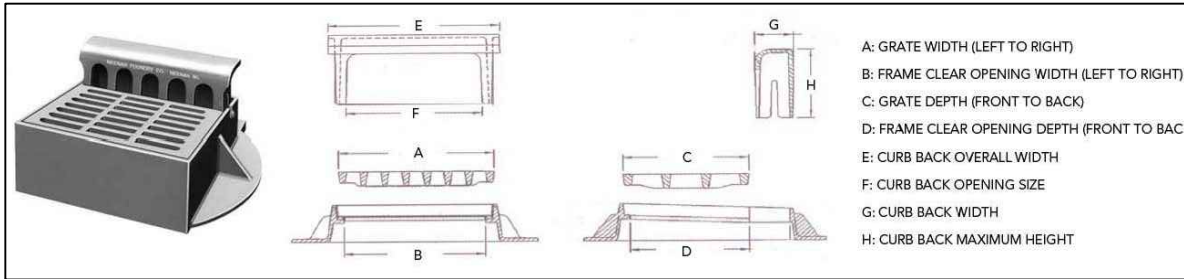

Catch-IT Frame with FX Bag		Field Inlet Dimensions		Flexstorm Framing Dims				Flexstorm Ratings (50%)		
ADS P/N	Flexstorm Item Code	Grate Size (A x C)	Clear Opening (B x D)	B1	D1	A1	C1	Bag Capacity (ft³)	FX/FX+ Flow Rate (CFS)	Bypass (CFS)
62MCBFX	C-SQCB-216-156-197-126-FX	21.62 x 15.62	19.68 x 12.62	19.0	11.5	21.0	11.5	0.7	1.3	1.5
62MCBFX	C-SQCB-200-170-180-145-FX	20 x 17	18 x 14.5	17.5	13.5	19.5	13.5	0.8	1.3	1.5
62MCBFX	C-SQCB-199-170-180-150-FX	19.87 x 17	18 x 15	17.5	14.0	19.5	14.0	0.8	1.3	1.5
62MCBFX	C-SQCB-200-170-180-150-FX	20 x 17	18 x 15	17.5	14.0	19.5	14.0	0.8	1.3	1.5
62MCBFX	C-SQCB-200-170-180-150-FX	20 x 17	18 x 15.0	17.5	14.0	19.5	14.0	0.8	1.3	1.5
62MCBFX	C-SQCB-216-156-197-135-FX	21.6 x 15.6	19.7 x 13.5	19.0	12.5	21.0	12.5	0.8	1.3	1.5
62MCBFX	C-SQCB-230-160-203-130-FX	23 x 16	20.25 x 13	20.0	12.0	22.0	12.0	0.8	1.4	1.5
62MCBFX	C-SQCB-200-170-180-155-FX	20 x 17	18 x 15.5	17.5	14.5	19.5	14.5	0.8	1.4	1.5
62MCBFX	C-SQCB-217-175-195-140-FX	21.7 x 17.5	19.5 x 14.0	19.0	13.0	21.0	13.0	0.8	1.4	1.5
62MCBFX	C-SQCB-230-160-205-135-FX	23 x 16	20.5 x 13.5	20.0	12.5	22.0	12.5	0.8	1.4	1.6
62MCBFX	C-SQCB-214-170-194-150-FX	21.4 x 17	19.4 x 15	19.0	14.0	21.0	14.0	0.8	1.4	1.6
62MCBFX	C-SQCB-213-170-195-155-FX	21.25 x 17	19.5 x 15.5	19.0	14.5	21.0	14.5	0.9	1.4	1.6
62MCBFX	C-SQCB-220-170-200-150-FX	22 x 17	20 x 15	19.5	14.0	21.5	14.0	0.9	1.4	1.6
62MCBFX	C-SQCB-223-186-203-150-FX	22.25 x 18.62	20.25 x 22.06	20.0	14.0	22.0	14.0	0.9	1.4	1.6
62MCBFX	C-SQCB-214-170-194-160-FX	21.4 x 17	19.4 x 16.0	19.0	15.0	21.0	15.0	0.9	1.4	1.6
62MCBFX	C-SQCB-220-169-200-155-FX	22.0 x 16.9	20.0 x 15.5	19.5	14.5	21.5	14.5	0.9	1.4	1.6
62MCBFX	C-SQCB-223-186-203-155-FX	22.25 x 18.6	20.25 x 15.5	20.0	14.5	22.0	14.5	0.9	1.5	1.7
62MCBFX	C-SQCB-224-180-204-160-FX	22.375 x 18	20.375 x 16	20.0	15.0	22.0	15.0	1.0	1.5	1.7
62MCBFX	C-SQCB-230-160-215-150-FX	23 x 16	21.5 x 15	21.0	14.0	23.0	14.0	0.9	1.5	1.7
62MCBFX	C-SQCB-273-133-253-113-FX	27.25 x 10	25.25 x 11.25	25.0	10.5	27.0	10.5	0.8	1.5	1.7
62MCBFX	C-SQCB-288-114-270-100-FX	28.75 x 11.375	27 x 10	26.5	9.0	28.5	9.0	0.8	1.5	1.7
62MCBFX	C-SQCB-218-200-198-180-FX	21.75 x 20	19.75 x 18	19.5	17.0	21.5	17.0	1.1	1.5	1.8
62MCBFX	C-SQCB-229-179-238-160-FX	22.87 x 17.87	23.75 x 16	23.5	15.0	25.5	15.0	1.1	1.6	1.9
62MCBFX	C-SQCB-223-186-201-200-FX	22.25 x 18.62	20.125 x 20	19.5	19.0	21.5	19.0	1.2	1.6	1.9

NOTES:

1. RATINGS SHOWN ARE FOR STANDARD 22" BAG DEPTH; "SHORT" 12" DEPTH BAGS ARE AVAILABLE WITH -S SUFFIX; RATINGS REDUCED BY ~50%.

2. THE FOLLOWING REQUIRES ADDITIONAL REVIEW

- GRATES WITH EXTENDED BOTTOMS
- ANY OBSTRUCTED INLET OPENINGS

FLEXSTORM
INLET FILTERS
CATCH-IT




ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC A DIVISION OF ADS, INC.
WWW.INLETFILTERS.COM
(866) 287-8655 PH
(630) 355-3477 FX
INFO@INLETFILTERS.COM

THIS PRINT REQUIRES SUBJECT MATTER IN WHICH FLEXSTORM HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISCLOSURE TO OTHERS IS PROHIBITED, EXCEPT BY WRITTEN PERMISSION FROM FLEXSTORM. ©2013 ADS, INC.	SIZE: C FRAME TYPE: SQCB1 DWG NO: C-62MCB-FX	REV: A
---	--	--------

SCALE: SHEET 1 OF 2

FLEXSTORM P/Ns 62MCBFX

SQCB INLET TYPE: RAISED CAST IRON FRAME AND GRATE WITH CURB HOOD

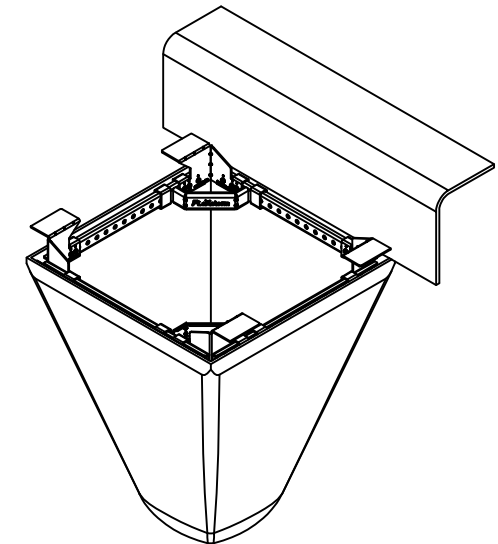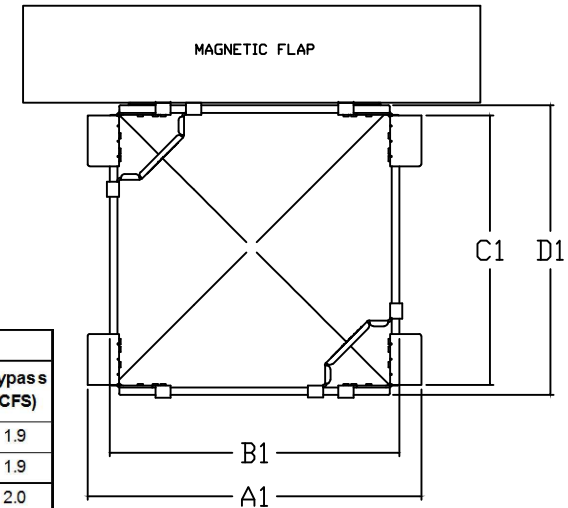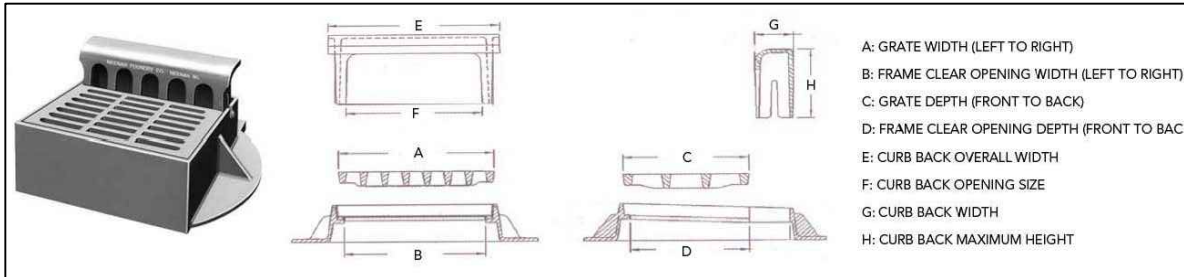

Catch-IT Frame with FX Bag		Field Inlet Dimensions		Flexstorm Framing Dims				Flexstorm Ratings (50%)		
ADS P/N	Flexstorm Item Code	Grate Size (A x C)	Clear Opening (B x D)	B1	D1	A1	C1	Bag Capacity (ft ³)	FX/FX+ Flow Rate (CFS)	Bypass (CFS)
62MCBFX	C-SQCB-214-170-193-218-FX	21.375 x 17	19.25 x 21.75	19.0	21.0	21.0	21.0	1.3	1.7	1.9
62MCBFX	C-SQCB-225-225-205-205-FX	22.5 x 22.5	20.5 x 20.5	20.0	19.5	22.0	19.5	1.2	1.7	1.9
62MCBFX	C-SQCB-295-164-276-146-FX	29.5 x 16.37 (2pc)	27.56 x 14.6 (2pc)	27.0	13.5	29.0	13.5	1.2	1.7	2.0
62MCBFX	C-SQCB-222-172-204-230-FX	22.187 x 17.187	20.375 x 23	20.0	22.0	22.0	22.0	1.4	1.8	2.0
62MCBFX	C-SQCB-225-180-208-229-FX	22.5 x 18	20.75 x 22.87	20.5	22.0	22.5	22.0	1.4	1.8	2.0
62MCBFX	C-SQCB-239-239-220-220-FX	23.87 x 23.87	22 x 22	21.5	21.0	23.5	21.0	1.4	1.8	2.0
62MCBFX	C-SQCB-240-240-220-220-FX	24 x 24	22 x 22	21.5	21.0	23.5	21.0	1.4	1.8	2.0
62MCBFX	C-SQCB-265-225-245-198-FX	26.5 x 22.5	24.5 x 19.75	24.0	19.0	26.0	19.0	1.5	1.8	2.1
62MCBFX	C-SQCB-216-175-221-226-FX	21.6 x 17.5	22.125 x 22.62	21.5	21.5	23.5	21.5	1.5	1.8	2.1
62MCBFX	C-SQCB-243-236-230-220-FX	24.25 x 23.62	23 x 22	22.5	21.0	24.5	21.0	1.5	1.8	2.1
62MCBFX	C-SQCB-200-220-180-270-FX	20 x 22	18 x 27	17.5	26.0	19.5	26.0	1.4	1.8	2.1
62MCBFX	C-SQCB-243-236-230-220-FX	24.25 x 23.625	23 x 22	22.5	21.0	24.5	21.0	1.5	1.8	2.1
62MCBFX	C-SQCB-291-216-270-190-FX	29.125 x 21.62	27 x 19	26.5	18.0	28.5	18.0	1.5	1.9	2.1
62MCBFX	C-SQCB-240-184-220-240-FX	24 x 18.4	22 x 24	21.5	23.0	23.5	23.0	1.6	1.9	2.1
62MCBFX	C-SQCB-291-216-270-195-FX	29.125 x 21.62	27 x 19.5	26.5	18.5	28.5	18.5	1.6	1.9	2.2
62MCBFX	C-SQCB-348-156-330-140-FX	34.75 x 15.6	33 x 14	32.5	13.0	34.5	13.0	1.3	1.9	2.2
62MCBFX	C-SQCB-353-151-330-140-FX	35.25 x 15.125	33 x 14	32.5	13.0	34.5	13.0	1.3	1.9	2.2
62MCBFX	C-SQCB-353-178-331-140-FX	35.25 x 17.75	33.125 x 14	32.5	13.0	34.5	13.0	1.3	1.9	2.2
62MCBFX	C-SQCB-346-156-331-146-FX	34.625 x 15.625	33.0625 x 14.625	32.5	13.5	34.5	13.5	1.4	1.9	2.2
62MCBFX	C-SQCB-353-151-330-155-FX	35.25 x 15.125	33 x 15.5	32.5	14.5	34.5	14.5	1.5	2.0	2.3

NOTES:

1. RATINGS SHOWN ARE FOR STANDARD 22" BAG DEPTH; "SHORT" 12" DEPTH BAGS ARE AVAILABLE WITH -S SUFFIX; RATINGS REDUCED BY ~50%.

2. THE FOLLOWING REQUIRES ADDITIONAL REVIEW

- GRATES WITH EXTENDED BOTTOMS
- ANY OBSTRUCTED INLET OPENINGS

FLEXSTORM
INLET FILTERS

CATCH-IT




THIS PRINT RELEASED SUBJECT MATTER IN WHICH FLEXSTORM HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISSEMINATION TO OTHERS IS PROHIBITED, EXCEPT BY WRITTEN PERMISSION FROM FLEXSTORM. ©2013 ADS, INC.

ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC. A DIVISION OF ADS, INC.
WWW.INLETFILTERS.COM
 (866) 287-8655 PH
 (630) 355-3477 FX
INFO@INLETFILTERS.COM

SIZE	FRAME TYPE	DWG NO	REV
C	SQCB1	C-62MCB-FX	A
SCALE			SHEET 2 OF 2

FLEXSTORM P/Ns 62LCBFX

SQCB INLET TYPE: RAISED CAST IRON FRAME AND GRATE WITH CURB HOOD

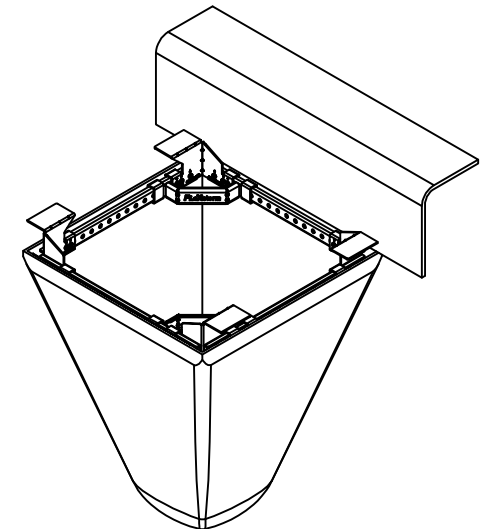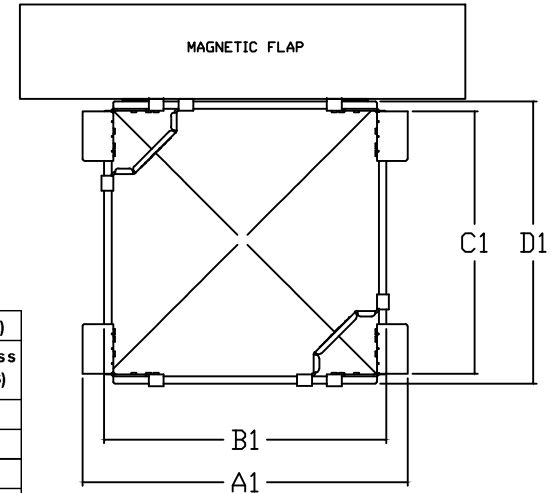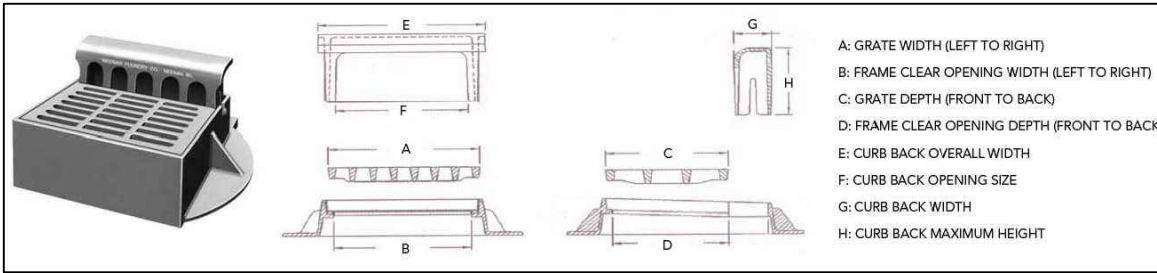

Catch-IT Frame with FX Bag		Field Inlet Dimensions		Flexstorm Framing Dims				Flexstorm Ratings (Flow at 50% max)		
ADS P/N	Flexstorm Item Code	Grate Size (A x C)	Clear Opening (B x D)	B1	D1	A1	C1	Bag Capacity (ft³)	FX/FX+ Flow Rate (CFS)	Bypass (CFS)
62LCBFX	C-SQCB-298-218-274-195-FX	29.75 x 21.75	27.375 x 19.5	27.0	18.5	29.0	18.5	3.2	1.9	4.4
62LCBFX	C-SQCB-353-178-330-150-FX	35.25 x 17.75	33 x 15	32.5	14.0	34.5	14.0	2.9	2.0	4.5
62LCBFX	C-SQCB-355-175-335-150-FX	35.5 X 17.5	33.5 X 15	33.0	14.0	35.0	14.0	2.9	2.0	4.5
62LCBFX	C-SQCB-318-214-296-190-FX	31.75 x 21.4	29.6 x 19	29.0	18.0	31.0	18.0	3.3	2.0	4.5
62LCBFX	C-SQCB-355-175-330-160-FX	35.5 x 17.5	33 x 16	32.5	15.0	34.5	15.0	3.1	2.0	4.6
62LCBFX	C-SQCB-355-178-335-160-FX	35.5 x 17.75	33.5 X 16	33.0	15.0	35.0	15.0	3.2	2.0	4.6
62LCBFX	C-SQCB-315-214-300-196-FX	31.5 X 21.4	30 X 19.6	29.5	18.5	31.5	18.5	3.5	2.0	4.6
62LCBFX	C-SQCB-338-218-314-194-FX	33.75 x 21.75	31.375 x 19.375	31.0	18.5	33.0	18.5	3.7	2.1	4.8
62LCBFX	C-SQCB-381-180-355-155-FX	38.1 x 18	35.5 x 15.5	35.0	14.5	37.0	14.5	3.2	2.1	4.8
62LCBFX	C-SQCB-278-245-280-230-FX	27.75 X 24.5	28 X 23	27.5	22.0	29.5	22.0	3.9	2.1	4.8
62LCBFX	C-SQCB-340-213-321-194-FX	34 x 21.25	32.125 x 19.375	31.5	18.5	33.5	18.5	3.7	2.1	4.8
62LCBFX	C-SQCB-380-169-364-151-FX	38 x 16.87	36.375 x 15.125	36.0	14.0	38.0	14.0	3.2	2.1	4.8
62LCBFX	C-SQCB-340-213-323-195-FX	34 x 21.25	32.25 x 19.5	32.0	18.5	34.0	18.5	3.8	2.1	4.9
62LCBFX	C-SQCB-358-238-334-210-FX	35.8 x 23.8	33.4 x 21	33.0	20.0	35.0	20.0	4.2	2.2	5.1
62LCBFX	C-SQCB-363-218-340-205-FX	36.25 x 21.75	34 x 20.5	33.5	19.5	35.5	19.5	4.2	2.2	5.1
62LCBFX	C-SQCB-358-239-335-218-FX	35.75 X 23.87	33.5 X 21.75	33.0	21.0	35.0	21.0	4.4	2.3	5.2
62LCBFX	C-SQCB-393-229-379-210-FX	39.25(x2) x 22.87	37.87 (x2) x 21	37.5	20.0	39.5	20.0	4.8	2.4	5.5
62LCBFX	C-SQCB-395-229-379-210-FX	39.5 x 22.87	37.87 x 21	37.5	20.0	39.5	20.0	4.8	2.4	5.5
62LCBFX	C-SQCB-375-245-378-230-FX	37.5 x 24.5	37.75 x 23	37.5	22.0	39.5	22.0	5.3	2.5	5.7
62LCBFX	C-SQCB-475-245-378-230-FX	47.5 X 24.5	37.75 X 23	37.5	22.0	39.5	22.0	5.3	2.5	5.7
62LCBFX	C-SQCB-358-238-355-273-FX	35.75 x 23.75	35.5 x 27.25	35.0	26.5	37.0	26.5	5.9	2.6	5.9
62LCBFX	C-SQCB-480-240-440-200-FX	48 x 24	44 x 20	43.5	19.0	45.5	19.0	5.3	2.6	6.0
62LCBFX	C-SQCB-365-244-350-291-FX	36.5 x 24.375	35 x 29.0625	34.5	28.0	36.5	28.0	6.1	2.6	6.0

NOTES:

1. RATINGS SHOWN ARE FOR STANDARD 22" BAG DEPTH; "SHORT" 12" DEPTH BAGS ARE AVAILABLE WITH -S SUFFIX; RATINGS REDUCED BY ~50%.

2. THE FOLLOWING REQUIRES ADDITIONAL REVIEW

- GRATES WITH EXTENDED BOTTOMS
- ANY OBSTRUCTED INLET OPENINGS

FLEXSTORM
INLET FILTERS
CATCH-IT

THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH FLEXSTORM HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISCLOSURE TO OTHERS IS PROHIBITED, EXCEPT BY WRITTEN PERMISSION FROM FLEXSTORM. ©2013 ADS, INC.

ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC A DIVISION OF ADS, INC.
WWW.INLETFILTERS.COM
(866) 287-8655 PH
(630) 355-3477 FX
INFO@INLETFILTERS.COM

SIZE	FRAME TYPE	DWG NO	REV
C	SQCB1	C-62LCB-FX	A

SCALE: _____ SHEET 1 OF 1