



# FLEXSTORM P/Ns 62SRDFX


RD INLET TYPE: RAISED CAST IRON FRAME AND ROUND GRATE

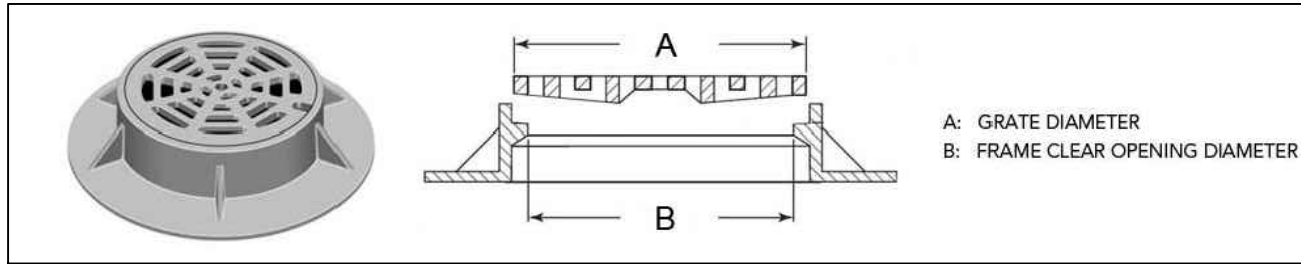

A: GRATE DIAMETER  
B: FRAME CLEAR OPENING DIAMETER

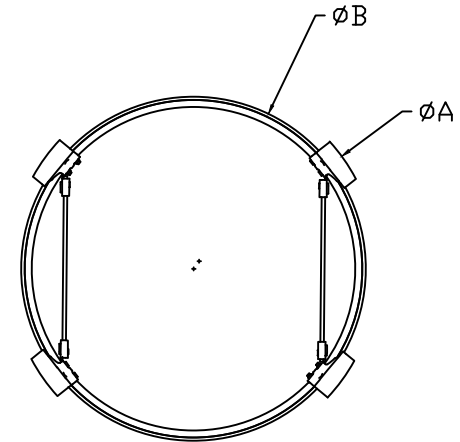

Catch-It Frame with FX Bag		Field Inlet Dimensions		Flexstorm Framing Dims		Flexstorm Ratings (Flow at 50% max)		
ADS P/N	Flexstorm Item Code	A	B	B1	A1	Bag Capacity (ft <sup>3</sup> )	PC/PC+ Flow Rate (CFS)	Bypass (CFS)
62SRDFX	C-RD-120-110-FX	12	11	9.5	12.0	0.3	0.6	2.2
62SRDFX	C-RD-130-115-FX	13	11.5	10.5	13.0	0.4	0.7	2.4
62SRDFX	C-RD-158-150-FX	15.75	15.0	13.3	15.8	0.6	0.9	3.1
62SRDFX	C-RD-180-170-FX	18	17.0	15.5	18.0	0.8	1.0	3.5

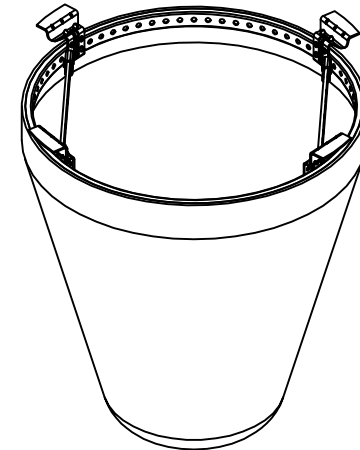


**NOTES:**

- RATINGS SHOWN ARE FOR STANDARD 22" BAG DEPTH; "SHORT" 12" DEPTH BAGS ARE AVAILABLE WITH -S SUFFIX; RATINGS REDUCED BY ~50%.
- THE FOLLOWING REQUIRES ADDITIONAL REVIEW
  - GRATES WITH EXTENDED BOTTOMS
  - ANY OBSTRUCTED INLET OPENINGS


	ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC A DIVISION OF ADS, INC. WWW.INLETFILTERS.COM (866) 287-8655 PH (630) 355-3477 FX INFO@INLETFILTERS.COM		
	SIZE C	FRAME TYPE RD	DWG NO C-62SRD-FX
THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH FLEXSTORM HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISCLOSURE TO OTHERS IS PROHIBITED, EXCEPT BY WRITTEN PERMISSION FROM FLEXSTORM. ©2013 ADS, INC.		SCALE	SHEET 1 OF 1

# FLEXSTORM P/Ns 62MRDFX

RD INLET TYPE: RAISED CAST IRON FRAME AND ROUND GRATE

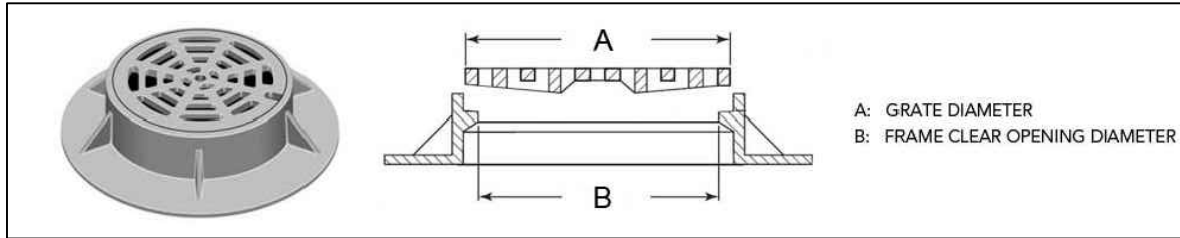


A: GRATE DIAMETER  
B: FRAME CLEAR OPENING DIAMETER

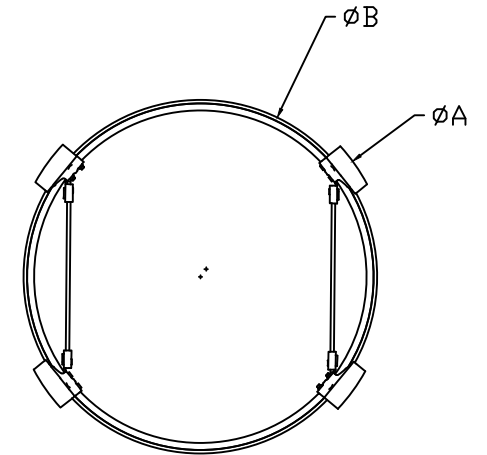


Catch-It Frame with FX Bag		Field Inlet Dimensions		Flexstorm Framing Dims		Flexstorm Ratings (Flow at 50% max)		
ADS P/N	Flexstorm Item Code	A	B	B1	A1	Bag Capacity (ft³)	PC/PC+ Flow Rate (CFS)	Bypass (CFS)
62MRDFX	C-RD-205-180-FX	20.5	18	17.5	20.0	1.1	1.1	4.1
62MRDFX	C-RD-218-200-FX	21.75	20	19.3	21.8	1.3	1.2	4.5
62MRDFX	C-RD-220-200-FX	22	20	19.5	22.0	1.3	1.3	4.5
62MRDFX	C-RD-225-200-FX	22.5	20	19.5	22.0	1.3	1.3	4.5
62MRDFX	C-RD-228-200-FX	22.75	20	19.5	22.0	1.3	1.3	4.5
62MRDFX	C-RD-320-200-FX	32	20	19.5	22.0	1.3	1.3	0.0
62MRDFX	C-RD-228-203-FX	22.75	20.25	19.8	22.3	1.4	1.3	4.5
62MRDFX	C-RD-229-201-FX	22.87	20.125	19.6	22.1	1.3	1.3	4.5
62MRDFX	C-RD-225-203-FX	22.5	20.25	19.8	22.3	1.4	1.3	4.5
62MRDFX	C-RD-228-203-FX	22.75	20.25	19.8	22.3	1.4	1.3	4.5
62MRDFX	C-RD-223-204-FX	22.25	20.375	19.8	22.3	1.4	1.3	4.5
62MRDFX	C-RD-220-205-FX	22	20.468	19.5	22.0	1.3	1.3	4.5
62MRDFX	C-RD-223-205-FX	22.25	20.5	19.8	22.3	1.4	1.3	4.5
62MRDFX	C-RD-225-205-FX	22.5	20.5	20.0	22.5	1.4	1.3	4.6
62MRDFX	C-RD-228-205-FX	22.75	20.5	20.0	22.5	1.4	1.3	4.6
62MRDFX	C-RD-230-205-FX	23	20.5	20.0	22.5	1.4	1.3	4.6
62MRDFX	C-RD-228-206-FX	22.75	20.62	20.1	22.6	1.4	1.3	4.7
62MRDFX	C-RD-228-208-FX	22.75	20.75	20.3	22.8	1.4	1.3	4.7
62MRDFX	C-RD-230-209-FX	23	20.87	20.4	22.9	1.4	1.3	4.7
62MRDFX	C-RD-223-210-FX	22.25	21	19.8	22.3	1.4	1.3	4.5
62MRDFX	C-RD-228-210-FX	22.75	21	20.3	22.8	1.4	1.3	4.7
62MRDFX	C-RD-228-210-FX	22.75	21	20.3	22.8	1.4	1.3	4.7
62MRDFX	C-RD-230-210-FX	23	21	20.5	23.0	1.5	1.3	4.7
62MRDFX	C-RD-238-210-FX	23.75	21	20.5	23.0	1.5	1.3	4.7
62MRDFX	C-RD-238-211-FX	23.75	21.056	20.6	23.1	1.5	1.3	4.7
62MRDFX	C-RD-230-211-FX	23	21.06	20.5	23.0	1.5	1.3	4.7
62MRDFX	C-RD-228-211-FX	22.75	21.125	20.3	22.8	1.4	1.3	4.7
62MRDFX	C-RD-234-211-FX	23.375	21.125	20.6	23.1	1.5	1.3	4.7
62MRDFX	C-RD-228-213-FX	22.75	21.25	20.3	22.8	1.4	1.3	4.7
62MRDFX	C-RD-238-215-FX	23.75	21.468	21.0	23.5	1.5	1.4	4.9
62MRDFX	C-RD-225-215-FX	22.5	21.5	20.0	22.5	1.4	1.3	4.6
62MRDFX	C-RD-235-215-FX	23.5	21.5	21.0	23.5	1.5	1.4	4.9
62MRDFX	C-RD-238-217-FX	23.75	21.656	21.2	23.7	1.6	1.4	4.9

**NOTES:**

- RATINGS SHOWN ARE FOR STANDARD 22" BAG DEPTH; "SHORT" 12" DEPTH BAGS ARE AVAILABLE WITH -S SUFFIX; RATINGS REDUCED BY ~50%.
- THE FOLLOWING REQUIRES ADDITIONAL REVIEW
  - GRATES WITH EXTENDED BOTTOMS
  - ANY OBSTRUCTED INLET OPENINGS

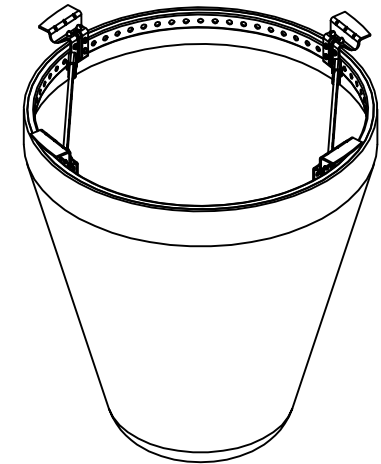



**FLEXSTORM**  
INLET FILTERS

**CATCH-IT**


THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH FLEXSTORM HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISCLOSURE TO OTHERS IS PROHIBITED, EXCEPT BY WRITTEN PERMISSION FROM FLEXSTORM. ©2013 ADS, INC.

ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC. A DIVISION OF ADS, INC.  
WWW.INLETFILTERS.COM  
(866) 287-8655 PH  
(630) 355-3477 FX  
INFO@INLETFILTERS.COM


SIZE	FRAME TYPE	DWG NO	REV
C	RD	C-62MRD-FX	A
SCALE			SHEET 1 OF 2

# FLEXSTORM P/Ns 62MRDFX


## RD INLET TYPE: RAISED CAST IRON FRAME AND ROUND GRATE

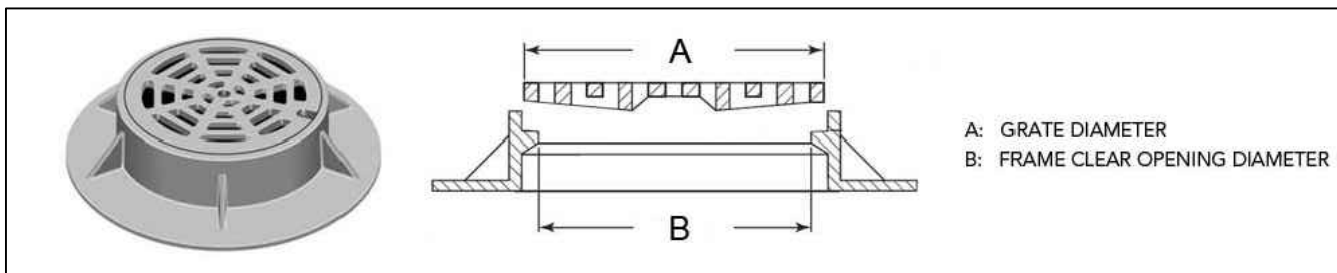

A: GRATE DIAMETER  
B: FRAME CLEAR OPENING DIAMETER

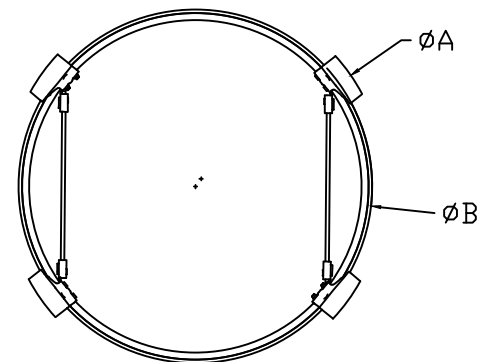

Catch-It Frame with FX Bag		Field Inlet Dimensions		Flexstorm Framing Dims		Flexstorm Ratings (Flow at 50% max)		
ADS P/N	Flexstorm Item Code	A	B	B1	A1	Bag Capacity (ft <sup>3</sup> )	PC/PC+ Flow Rate (CFS)	Bypass (CFS)
62MRDFX	C-RD-238-218-FX	23.75	21.75	21.3	23.8	1.6	1.4	4.9
62MRDFX	C-RD-240-218-FX	24	21.75	21.3	23.8	1.6	1.4	4.9
62MRDFX	C-RD-233-220-FX	23.25	22	20.8	23.3	1.5	1.3	4.9
62MRDFX	C-RD-238-220-FX	23.75	22	21.3	23.8	1.6	1.4	4.9
62MRDFX	C-RD-239-220-FX	23.87	22	21.4	23.9	1.6	1.4	4.9
62MRDFX	C-RD-260-220-FX	26	22	21.5	24.0	1.6	1.4	0.0
62MRDFX	C-RD-238-221-FX	23.75	22.125	21.3	23.8	1.6	1.4	4.9
62MRDFX	C-RD-228-223-FX	22.75	22.25	20.3	22.8	1.4	1.3	4.7
62MRDFX	C-RD-238-223-FX	23.75	22.25	21.3	23.8	1.6	1.4	4.9
62MRDFX	C-RD-240-223-FX	24	22.25	21.5	24.0	1.6	1.4	4.9
62MRDFX	C-RD-238-224-FX	23.75	22.375	21.3	23.8	1.6	1.4	4.9
62MRDFX	C-RD-239-224-FX	23.87	22.375	21.4	23.9	1.6	1.4	4.9
62MRDFX	C-RD-238-225-FX	23.75	22.5	21.3	23.8	1.6	1.4	4.9
62MRDFX	C-RD-240-225-FX	24	22.5	21.5	24.0	1.6	1.4	4.9
62MRDFX	C-RD-248-226-FX	24.75	22.62	22.1	24.6	1.7	1.4	5.2
62MRDFX	C-RD-239-228-FX	23.87	22.75	21.4	23.9	1.6	1.4	4.9
62MRDFX	C-RD-238-230-FX	23.75	23	21.3	23.8	1.6	1.4	4.9
62MRDFX	C-RD-240-230-FX	24	23	21.5	24.0	1.6	1.4	4.9
62MRDFX	C-RD-250-230-FX	25	23	22.5	25.0	1.8	1.4	5.2
62MRDFX	C-RD-254-230-FX	25.375	23	22.5	25.0	1.8	1.4	5.2
62MRDFX	C-RD-256-230-FX	25.62	23	22.5	25.0	1.8	1.4	5.2
62MRDFX	C-RD-258-230-FX	25.75	23	22.5	25.0	1.8	1.4	5.2
62MRDFX	C-RD-248-234-FX	24.75	23.375	22.3	24.8	1.7	1.4	5.2
62MRDFX	C-RD-260-235-FX	26	23.5	23.0	25.5	1.8	1.5	5.4
62MRDFX	C-RD-258-236-FX	25.75	23.62	23.1	25.6	1.9	1.5	5.4
62MRDFX	C-RD-258-238-FX	25.75	23.812	23.3	25.8	1.9	1.5	5.4
62MRDFX	C-RD-253-240-FX	25.25	24	22.8	25.3	1.8	1.5	5.2
62MRDFX	C-RD-258-240-FX	25.75	24	23.3	25.8	1.9	1.5	5.4
62MRDFX	C-RD-258-240-FX	25.75	24	23.3	25.8	1.9	1.5	5.4
62MRDFX	C-RD-260-240-FX	26	24	23.5	26.0	1.9	1.5	5.4
62MRDFX	C-RD-268-240-FX	26.75	24	23.5	26.0	1.9	1.5	5.4
62MRDFX	C-RD-260-241-FX	26	24.1	23.5	26.0	1.9	1.5	5.4
62MRDFX	C-RD-263-241-FX	26.25	24.1	23.6	26.1	1.9	1.5	5.4
62MRDFX	C-RD-258-241-FX	25.75	24.125	23.3	25.8	1.9	1.5	5.4
62MRDFX	C-RD-258-243-FX	25.75	24.25	23.3	25.8	1.9	1.5	5.4

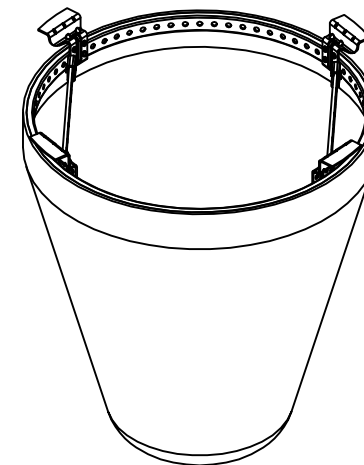

### NOTES:

1. RATINGS SHOWN ARE FOR STANDARD 22" BAG DEPTH; "SHORT" 12" DEPTH BAGS ARE AVAILABLE WITH -S SUFFIX; RATINGS REDUCED BY ~50%.

2. THE FOLLOWING REQUIRES ADDITIONAL REVIEW

- GRATES WITH EXTENDED BOTTOMS
- ANY OBSTRUCTED INLET OPENINGS




**FLEXSTORM**  
INLET FILTERS  
**CATCH-IT**

ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC A DIVISION OF ADS, INC.  
WWW.INLETFILTERS.COM  
(866) 287-8655 PH  
(630) 355-3477 FX  
INFO@INLETFILTERS.COM

THIS PRINT RELEASED SUBJECT MATTER IN WHICH FLEXSTORM HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISSEMINATION TO OTHERS IS PROHIBITED, EXCEPT BY WRITTEN PERMISSION FROM FLEXSTORM. ©2013 ADS, INC.	SIZE	FRAME TYPE	DWG NO	REV
C	RD	C-62MRD-FX	A	
SCALE				SHEET 2 OF 2

# FLEXSTORM P/Ns 62LRDFX

RD INLET TYPE: ROUND IN CONCRETE PRECAST WITH SLAB TOP

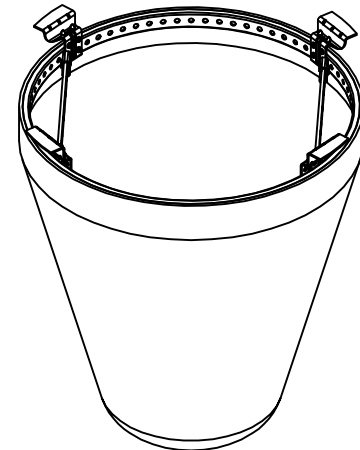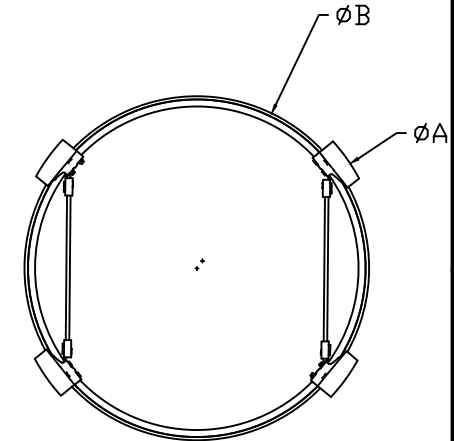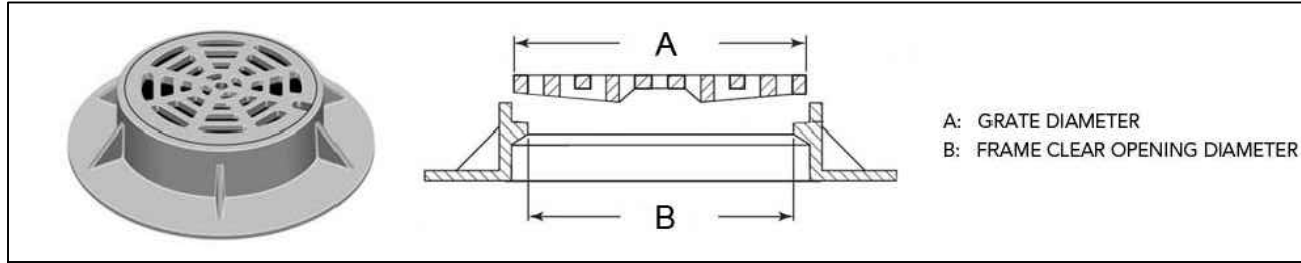

Catch-It Frame with FX Bag		Field Inlet Dimensions		Flexstorm Framing Dims		Flexstorm Ratings (Flow at 50% max)		
		A	B	B1	A1	Bag Capacity (ft <sup>3</sup> )	PC/PC+ Flow Rate (CFS)	Bypass (CFS)
ADS P/N	Flexstorm Item Code							
62LRDFX	C-RD-275-252-FX	27.5	25 1/6	24.7	27.2	2.1	1.6	5.8
62LRDFX	C-RD-275-258-FX	27.5	25.75	25.0	27.5	2.2	1.6	5.8
62LRDFX	C-RD-279-260-FX	27.875	26	25.4	27.9	2.2	1.6	5.8
62LRDFX	C-RD-290-270-FX	29	27	26.5	29.0	2.4	1.7	6.1
62LRDFX	C-RD-288-271-FX	28.75	27.125	26.3	28.8	2.4	1.7	6.1
62LRDFX	C-RD-318-300-FX	31.75	30	29.3	31.8	3.0	1.9	6.8
62LRDFX	C-RD-319-300-FX	31.87	30	29.4	31.9	3.0	1.9	6.8
62LRDFX	C-RD-320-300-FX	32	30	29.5	32.0	3.0	1.9	6.8
62LRDFX	C-RD-323-303-FX	32.25	30.25	29.8	32.3	3.1	1.9	6.8
62LRDFX	C-RD-341-315-FX	34.125	31.5	31.0	33.5	3.3	2.0	7.2
62LRDFX	C-RD-341-323-FX	34.125	32.25	31.6	34.1	3.5	2.0	7.4
62LRDFX	C-RD-343-323-FX	34.25	32.25	31.8	34.3	3.5	2.0	7.4
62LRDFX	C-RD-341-325-FX	34.125	32.5	31.6	34.1	3.5	2.0	7.4
62LRDFX	C-RD-360-340-FX	36	34	33.5	36.0	3.9	2.1	7.8
62LRDFX	C-RD-380-360-FX	38	36	35.5	38.0	4.4	2.3	8.2

**NOTES:**

1. RATINGS SHOWN ARE FOR STANDARD 22" BAG DEPTH; "SHORT" 12" DEPTH BAGS ARE AVAILABLE WITH -S SUFFIX; RATINGS REDUCED BY ~50%.

2. THE FOLLOWING REQUIRES ADDITIONAL REVIEW

-GRATES WITH EXTENDED BOTTOMS

-ANY OBSTRUCTED INLET OPENINGS

**FLEXSTORM**  
INLET FILTERS  
**CATCH-IT**

THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH FLEXSTORM HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISCLOSURE TO OTHERS IS PROHIBITED, EXCEPT BY WRITTEN PERMISSION FROM FLEXSTORM. ©2013 ADS, INC.

ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC A DIVISION OF ADS, INC.  
WWW.INLETFILTERS.COM  
(866) 287-8655 PH  
(630) 355-3477 FX  
INFO@INLETFILTERS.COM

SIZE	FRAME TYPE	DWG NO	REV
C	RD	C-62LRD-FX	A
SCALE	SHEET 1 OF 1		